

DESCRIPTION

- Handheld shower (nonmetallic)
- 69" double interlock spiral hose (metal)
- · Vacuum breaker
- Shower arm diverter (brass)
- Wall Brackets brass (2)


OPERATION


Pulsation and regular spray - select by rotating lever

• Designed to deliver 2.5 gpm (9.5 L/min) at 60 psi **STANDARDS**

 Designed and manufactured to comply with the applicable requirements of: CSA B-125 and ASME specifications referenced therein **WARRANTY** A112.18.1M and ASSE 1014 and all applicable

• Warranted for one year against material or manufacturing defects

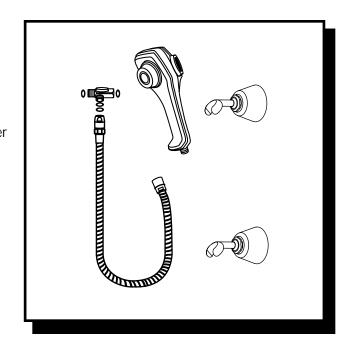

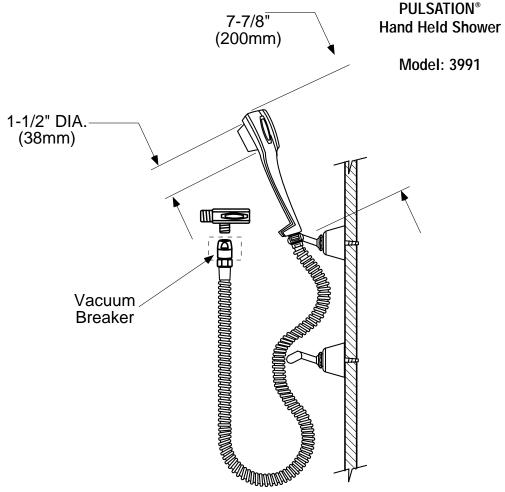

CRITICAL DIMENSIONS

(DO NOT SCALE)