

DESCRIPTION

- Handheld shower (nonmetallic)
- 69" double interlock spiral hose (metal)
- · Vacuum breaker
- Pin mounting brass (2)

OPERATION

 Pulsation and regular spray - select by rotating lever

FLOW


• Designed to deliver 2.5 gpm (9.5 L/min) at 60 psi


STANDARDS

 Designed and manufactured to comply with the applicable requirements of: CSA B-125 and ASME A112.18.1M and ASSE 1014 and all applicable specifications referenced therein

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

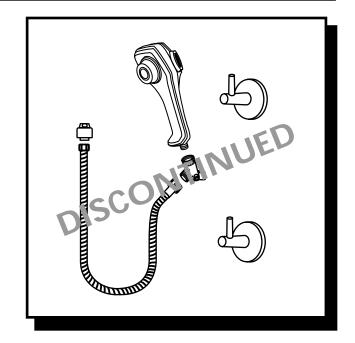

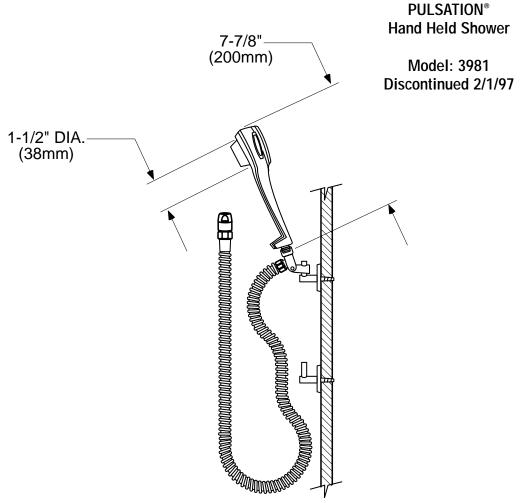

CRITICAL DIMENSIONS

(DO NOT SCALE)